



# Sony Ericsson K750i Keypad Replacement

This guide will demonstrate the procedures involved in removing or replacing the keypad of the Sony Ericsson K750i cell phone.

Written By: Abby Evers



## INTRODUCTION

Please note: you must remove the screws from the back casing before beginning this guide.


---



### TOOLS:

- [Phillips #0 Screwdriver](#) (1)
  - [Flathead 3/32" or 2.5 mm Screwdriver](#) (1)
  - [T6 Torx Screwdriver](#) (1)
-

## Step 1 — Back Casing

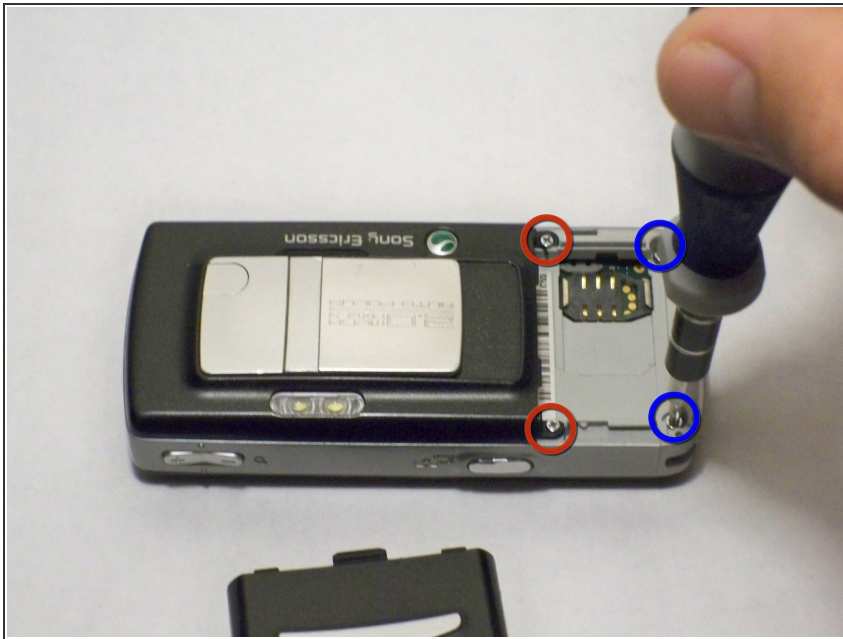

- Remove 4 screws from battery chamber
  - Red - Phillips 0 screwdriver
  - Blue - Torx 6 screwdriver


## Step 2



- Gently pry off back casing
- **Note:** work shim or flathead screwdriver around entire seam before attempting to pull off casing. This will reduce the chance of cracking the casing.



## Step 3

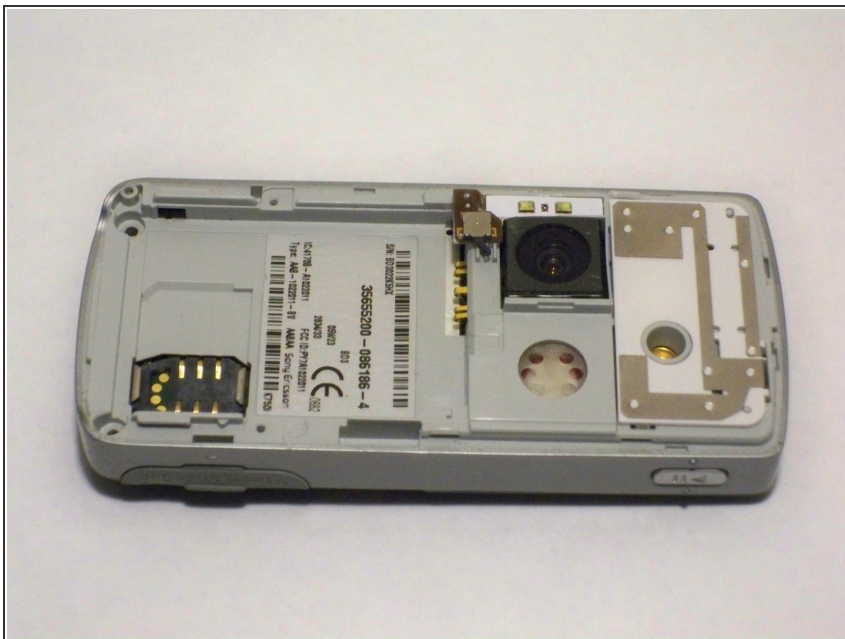

- Remove casing to expose camera components

## Step 4 — Keypad




- Gently pry open front casing by working a small shim or flathead screwdriver along the entire seam

## Step 5



- Remove front casing by gently lifting it from the phone
- Be careful not to pull off any other delicate pieces

## Step 6

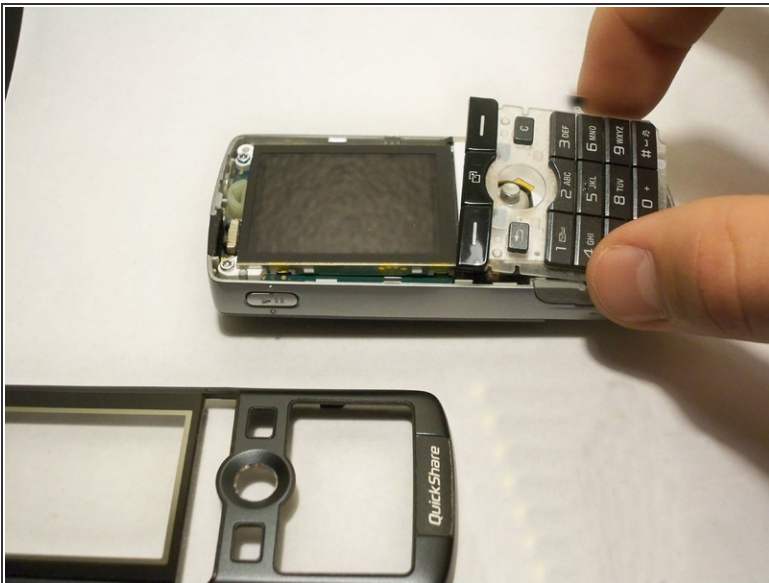

- Keypad should be easy to remove
- **Caution:** LCD screen is very fragile. Be careful not to catch the keypad on it while removing.

To reassemble your device, follow these instructions in reverse order.

